



# Magnetostrictive Level Transmitters

## Compact Line



measuring  
•  
monitoring  
•  
analysing

NMS



- Measuring length: 300 - 3000 mm
- Accuracy:  $\pm 1$  mm
- $p_{\max}$ : 25 bar;  $t_{\max}$ :  $+90$  °C
- Distance and level measurement
- Standard and mini type versions
- Stainless steel or titanium floats
- IP 65 protection
- HART® communication
- Chemicals, solvents, hydrocarbons
- Level monitoring of tanks
- Interface measurement
- Analogue output: 4 ... 20 mA HART®, 2-wire



N2

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com



**Description**

NMS magnetostrictive level transmitters are ideal solutions for high accuracy measurements of clean fluids. Its high precision renders the NMS suitable for measurements of highest demand. Integrating the transmitter into a process control system is easy thanks to the intelligent signal processing and communication software as well as the wide of range of accessories offered.

**Operating Principle**

A float containing a magnetic disc moves along a guide tube with the specific magnetostrictive wire in it. A pulse generated by the electronics travels along the magnetostrictive wire.

At the point the pulse reaches the float's magnetic field, a torsion develops. Reflected from the torsion point, the pulse creates an acoustic wave that travels back along the wire.

The 4...20 mA output of the transmitter is proportional to the elapsed time between the excitation and detection.

**Applications**

- Level measurement of liquids, with minimum 0.4 kg/dm<sup>3</sup> density
- Chemical industry
- Power plants
- Oil industry
- Water industry
- Chemicals, solvents, hydrocarbons

**Technical Details**

Type	Rigid probe version – standard	Rigid probe version – mini	Rigid probe version – plastic coated
Measured process value	Liquid level, distance		
Nominal length (L)	0.3...3.5 m	0.3... 1.5 m	0.3...3 m
Material of the tube	1.4571 (316Ti) stainless steel		
Max. medium pressure*	2.5 MPa (25 bar)	1.6 MPa (16 bar)	0.3 MPa (3 bar)
Medium temperature*	-40... +90 °C		
Standard float diameter / material	Ø54 x 60 mm cylindrical / 1.4404	Ø28 x 29 mm / 1.4404	Ø76 x 87 mm cylindrical / PVDF or PP
Medium density	Ø54 mm float min. 0.8 g/cm <sup>3</sup> ; Ø54 mm titanium float min. 0.55 g/cm <sup>3</sup> Ø95 mm float min. 0.55 g/cm <sup>3</sup> Ø124 mm or Ø95 mm titanium float min. 0.4 g/cm <sup>3</sup>		
Material of wetted parts	Stainless steel: 1.4571 (316Ti), floats: see "Float Selection"		PFA, PVDF, PP
Ambient temperature	-40... +70 °C		
Output	Analogue 4 – 20 mA (limit values: 3.9...20.5 mA)		
	Digital communication HART® (minimum loop resistance: 250 Ω)		
Error indication	Output signal = 22 mA or 3.8 mA		
Output load	$R_t = (U_t - 12.5 V) / 0.02 A$ , $U_t =$ power supply voltage		
Power supply	12.5...36 V <sub>DC</sub>		
Electrical protection	Class III		
Ingress protection	IP 65		
Process connection	As per order code		
Electric connection	Hirschmann EN 175 301-803-A (DIN 43650)		
Mass	2.9 kg + measuring probe: 0.6 kg/m	2.9 kg + measuring probe: 0.3 kg/m	2.9 kg + measuring probe: 0.7 kg/m

\* Details of non-standard floats can be found under "Float Selection".



**Measurement Data**

Resolution (on HART® transmitted value)	1 mm
Nonlinearity (on HART® transmitted value)	±2 mm or ±0.085% F.S. whichever is greater
Hysteresis (under reference conditions)	±0.25 mm
Zero span (in LEVEL measurement mode)	Anywhere within the active range
Measurement range (reducing)*	Minimal range: 32 mm; Maximum range: see "Dimensions"
Temperature error	0.04 mm / 10 °C (between -25 °C ... +50 °C)
Current output resolution	0.4 µA
Current output accuracy	33 µA
Current output temperature error	6 ppm / °C

\*The accuracy data is only valid for factory default settings



Order Details NMS (Example: NMS-SR250E05MS)

Model	Design	Process connection	Housing	Probe length
NMS-	<b>S</b> = Rigid probe, Standard version (max. probe length = 3.0 m) <b>M</b> = Rigid probe, mini (max. probe length 1.5 m) <b>K</b> = PFA coated rigid probe (max. probe length 3 m)	<b>R250</b> = G 1" <b>R25L</b> = G 1", low connection <b>R500</b> = G 2" <b>R50L</b> = G 2" low connection <b>N250</b> = 1" NPT <b>N25L</b> = 1" NPT, low connection <b>N500</b> = 2" NPT <b>N50L</b> = 2" NPT, low connection <b>T400<sup>1)</sup></b> = 1½" TriClamp <b>T40L<sup>1)</sup></b> = 1½" TriClamp, low connection <b>T500<sup>1)</sup></b> = 2" TriClamp <b>T50L<sup>1)</sup></b> = 2" TriClamp, low connection <b>T650</b> = 2½" TriClamp <b>T65L</b> = 2½" TriClamp, low connection <b>T800</b> = 3" TriClamp <b>T1H0</b> = 4" TriClamp <b>000U<sup>2)</sup></b> = w/o (for sliding sleeve)	E = st. steel	<b>03</b> = 0.3 m <b>04</b> = 0.4 m ... <b>09</b> = 0.9 m <b>10</b> = 1.0 m ... <b>15</b> = 1.5 m (max. length for NMS-M) ... <b>30</b> = 3.0 m (max. length for NMS-S/K)

Output/ Electrical Connection	Float options
<b>M</b> = 4...20 mA + HART® / Hirschmann EN 175 301-803-A (DIN 43650)	<b>S</b> = Standard float (see table for floats) <b>For NMS-S</b> <b>2</b> = Ø124 mm st. st. 1.4401 ball float, min. 0.40 kg/dm <sup>3</sup> <b>3</b> = Ø53.5 mm titanium float, min. 0.55 kg/dm <sup>3</sup> <b>4</b> = Ø50x100 mm titanium ball float, min. 0.45 kg/dm <sup>3</sup> <b>6</b> = Ø53.5 mm st. st. 1.4404, min. 0.8 kg/dm <sup>3</sup>
	<b>For NMS-K</b> <b>5</b> = Ø76x87 mm PP float, min. 0.40 kg/dm <sup>3</sup>

<sup>1)</sup> not for NMS-S

<sup>2)</sup> Optional threaded sliding sleeve should be ordered separately. Not for NMS-M.

Float Selection

Type	for NMS-S				for NMS-M	for NMS-K		
	Standard	Code "2"	Code "3" <sup>1)</sup>	Code "6" <sup>1)</sup>	Code "4" <sup>1)</sup>	Standard	Standard	Code "5"
Dimensions								
Medium Density (min.)	0.55 kg/dm <sup>3</sup>	0.4 kg/dm <sup>3</sup>	0.55 kg/dm <sup>3</sup>	0.8 kg/dm <sup>3</sup>	0.45 kg/dm <sup>3</sup>	0.8 kg/dm <sup>3</sup>	0.7 kg/dm <sup>3</sup>	0.4 kg/dm <sup>3</sup>
Material	1.4435	1.4401	Titan	1.4404	Titan	1.4404	PVDF	PP
Medium pressure	16 bar	25 bar			16 bar	10 bar	3 bar	

<sup>1)</sup> Designed for min. 2" process connection.




**Accessories NMS** (Example: ZUB-NMB/S CER25)

Model	Connection/ Material/ Size
ZUB-NMB/S	<b>For NMS-S</b>
	<b>CER25</b> = Sliding sleeve / stainless steel 1.4571 / 1" BSP
	<b>CER50</b> = Sliding sleeve / stainless steel 1.4571 / 2" BSP
	<b>CEN25</b> = Sliding sleeve / stainless steel 1.4571 / 1" NPT
	<b>CEN50</b> = Sliding sleeve / stainless steel 1.4571 / 2" NPT
	<b>For NMS-K</b>
	<b>CPR25</b> = Sliding sleeve / PVDF (sleeve), PP (flange) / 1" BSP
	<b>CPN25</b> = Sliding sleeve / PVDF (sleeve), PP (flange) / 1" NPT
	<b>F6F80*</b> = PP flange / PVDF (sleeve), PP (flange) / DN80, PN16
	<b>F6F1H*</b> = PP flange / PVDF (sleeve), PP (flange) / DN100, PN16

\* sliding sleeve CPR25 must be ordered in addition

**Wiring**

This transmitter is designed to operate on 12.5...36V<sub>DC</sub> power only.  
 The measured voltage on the terminals of the unit should be at least 12.5 V.  
 Using transmitter with HART® a terminal resistance with a minimum value of 250 Ω should be applied.




Order code HART® modem: **HARTCOMM** (Download of configuration software NUS-NTB-NRM-SW at [www.kobold.com](http://www.kobold.com))






Inactive Zones


NMS-MT40L

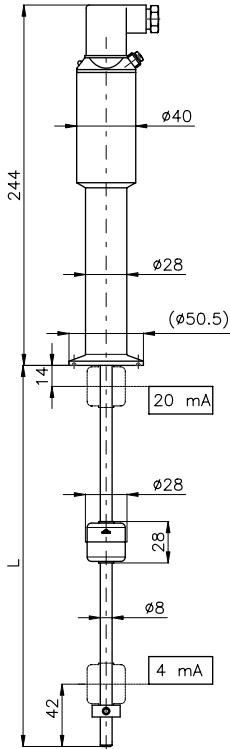


NMS-S000U

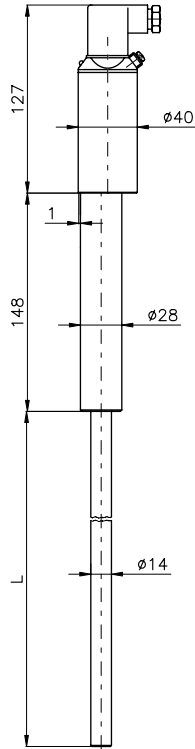


NMS-MR25L  
NMS-MN25L

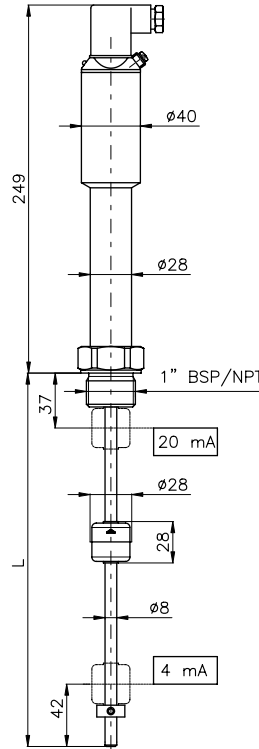


NMS-ST800

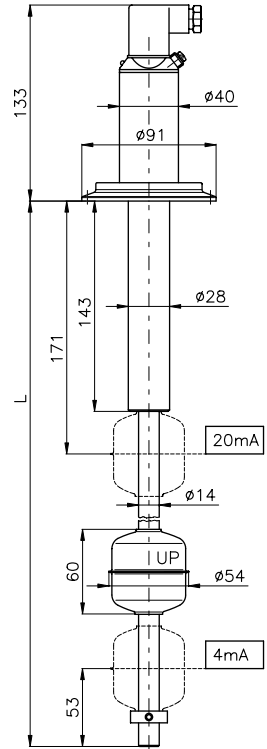


NMS-SR50L  
NMS-SN50L

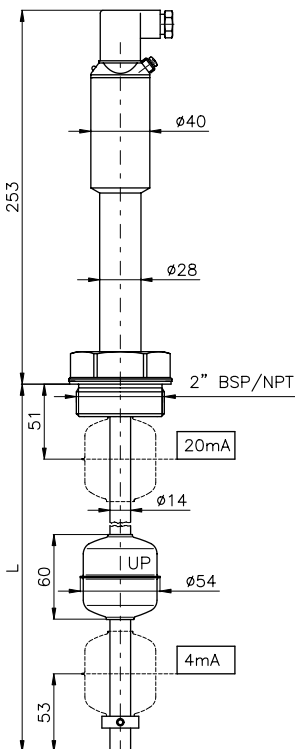


NMS-MR50L  
NMS-MN50L

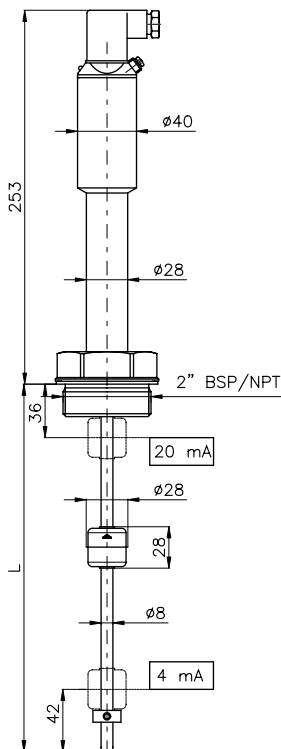

NMS-MT500

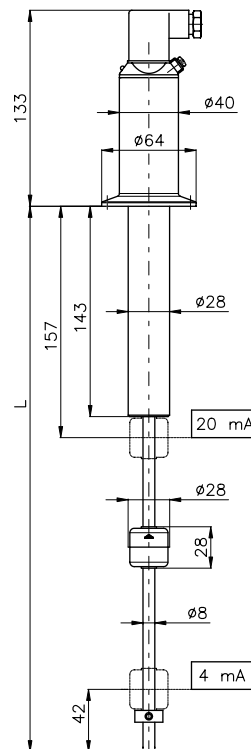


NMS-MT1H0

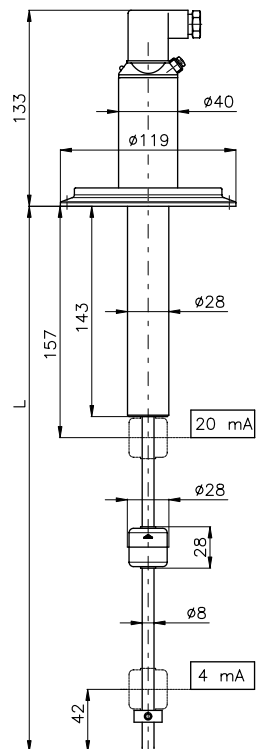


Inactive Zones (continued)


NMS-MR500  
NMS-MN500

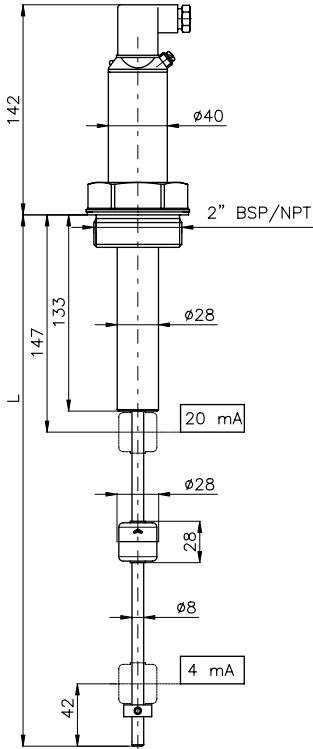


NMS-SR500  
NMS-SN500

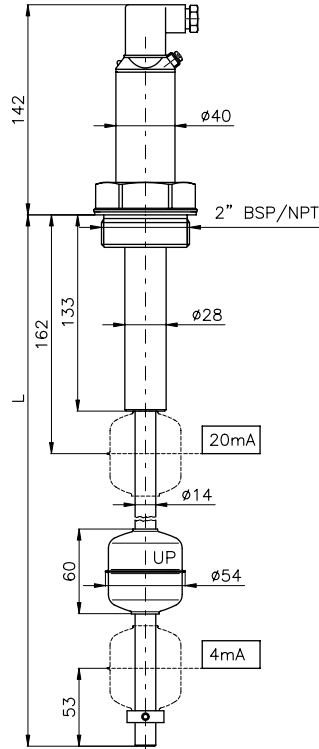


NMS-MR250  
NMS-MN250

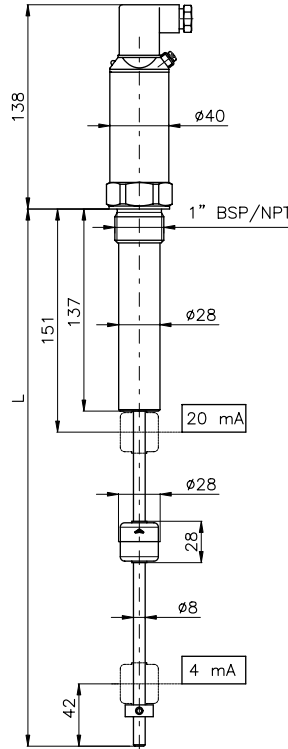

NMS-SR250  
NMS-SN250

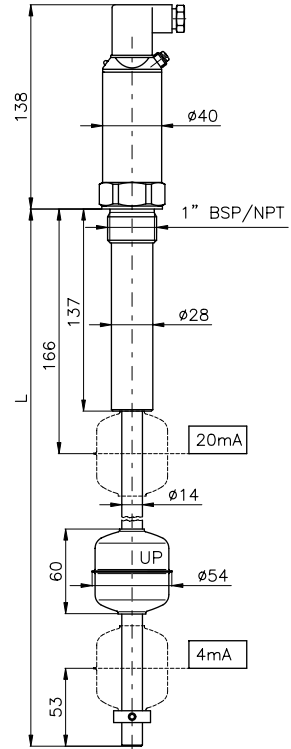


NMS-K

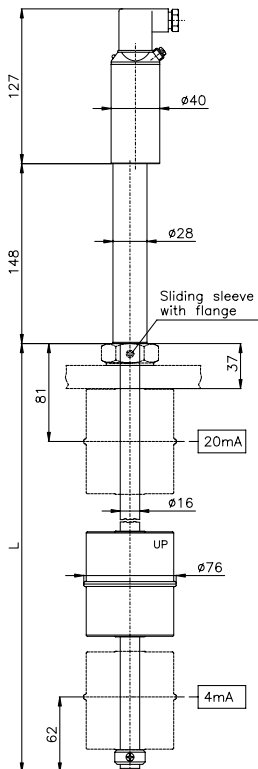


Dimensions [mm]


NMS-SR500 with DIN connector/  
NMS-SN500 with DIN connector

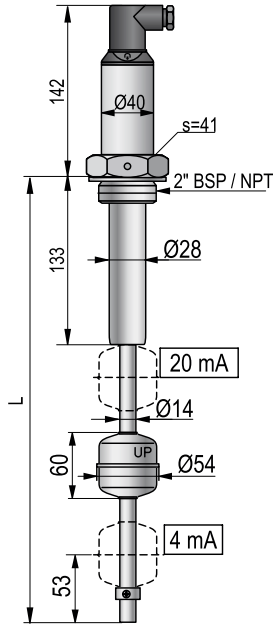


NMS-SR50L with DIN connector/  
NMS-SN50L with DIN connector

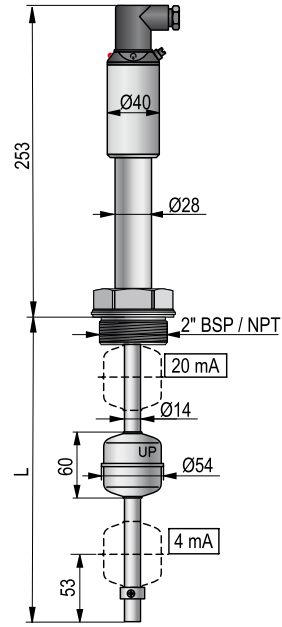

NMS-ST800 with DIN connector

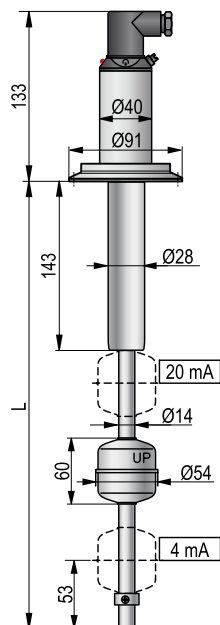


NMS-MR250 with DIN connector/  
NMS-MN250 with DIN connector

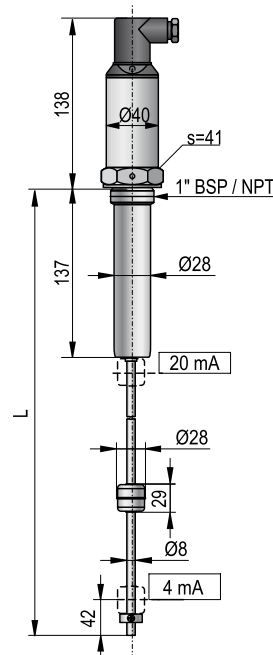




Dimensions [mm] (continued)


**NMS-MR25L with DIN connector/  
NMS-MN25L with DIN connector**

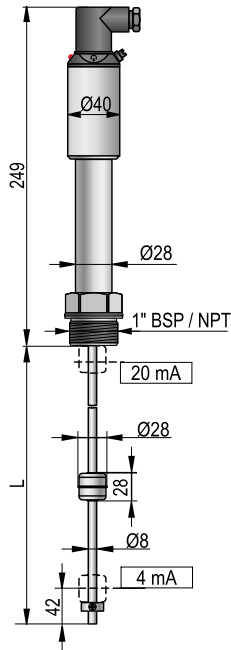

**NMS-MT500 with DIN connector**

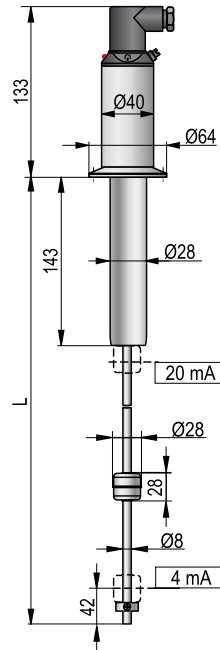


**NMS-K000U with DIN connector**

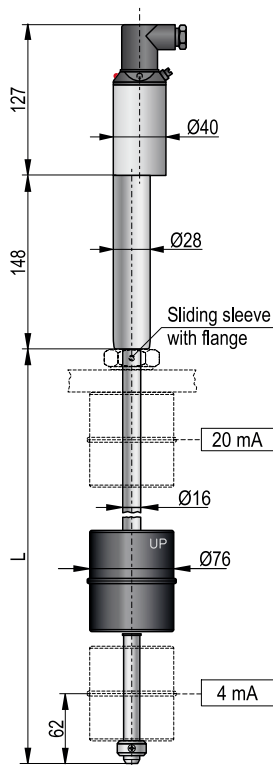


**Accessories**


**ZUB-NMB/S-CER25**



**ZUB-NMB/S-CEN25**



**ZUB-NMB/S-CER50**



**ZUB-NMB/S-CEN50**

