




Pressure Transducer Heavy Duty Industrial Thinfilm



measuring
•
monitoring
•
analysing

SEN-3376/3377

Option:
Pluggable Sandwich
Display Model AUF

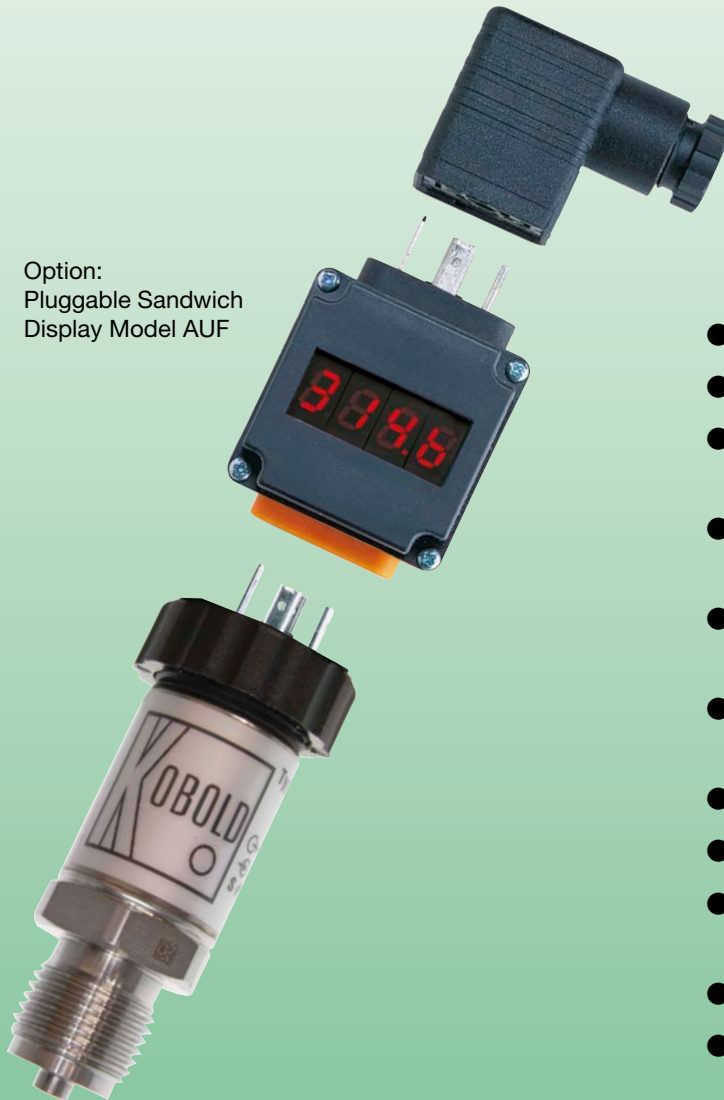

- Gauge pressure
- Internal diaphragm
- Measuring range:
0... 40 to 0 ... 1000 bar
- Measuring span
from 100 mbar
- Temperature (medium):
max. 100 °C
- Accuracy class:
0,25 or 0,5
- Material: stainless steel
- Connection: G ½ male
- Oil and grease free
on request
- LABS free on request
- Absolute pressure
on request



P2

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY,
GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS,
PERU, POLAND, REPUBLIC OF KOREA, RUSSIA, SPAIN, SWITZERLAND, THAILAND, TUNISIA,
TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



Description

The Heavy Duty Industrial pressure transducers are the leaders among the pressure transducers. The thin-film technology of the sensor element fulfils the most demanding requirements. Case and wetted parts are stainless steel. Therefore they are extremely resistant against aggressive process fluids. The sensor is unaffected by shock or vibration. Two adjustment potentiometers permit the use of these pressure transducers in most difficult applications like measurement of the hydrostatic column.

Dimensions (in mm)

SEN-3376...

SEN-3377...

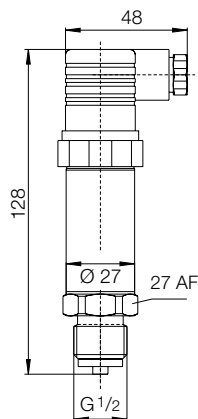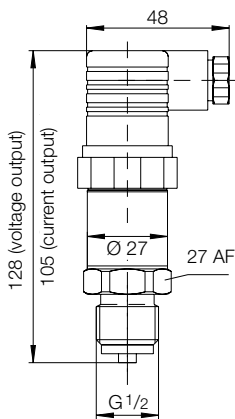

Applications

- Plant construction
- Development and laboratory
- Process engineering
- Pneumatics
- Hydraulics

Technical Data

Version: internal diaphragm
 Pressure type: gauge pressure (absolute pressure)
 Housing: stainless steel 1.4301
 Connection: G 1/2 male acc. to EN 837; G 1/4 male, 1/4 NPT and 1/2 NPT on request
 Wetted parts: stainless steel 1.4571 and 1.4542
 Sensor element: thinfilm
 Max. Temperature: storage: -40...+100 °C
 medium: -30...+100 °C
 ambient: -20...+80 °C
 Pressure limitation: ≤ 600 bar: 2 x range,
 > 600 bar: 1.5 x range, vacuum-tight
 Accuracy class: 0.25 or 0.5
 Repeatability: ≤ ± 0.05 % of full scale
 Stability per year: ≤ ± 0.2 % of full scale (under reference conditions)
 Electr. connection: plug acc. to DIN 43 650
 Power supply: 10 ... 30 V_{DC}
 (14 ... 30 V_{DC} for output 0 - 10 V)
 Output: 4 - 20 mA (2-wire),
 0 - 5 V_{DC}, 0 - 10 V_{DC}
 Load (Ω): ≤ (U_B-10 V)/0,02 A (for 4 - 20 mA)
 > 5 kΩ for 0 - 5 V
 > 10 kΩ for 0 - 10 V
 Response time: ≤ 1 ms (within 10 - 90 % of full scale)
 Adjustability: zero-point and span up to ± 5 %
 Temp. comp. range: 0 ... +80 °C
 Temperature influence: on zero-point and span
 ± 0,2 % / 10 K
 Protection: IP 65

Order Details Sensor (Example: SEN-3376 A105)

Model	Output	Measuring range	Connection
SEN-3376... Accuracy class 0.50 % SEN-3377... Accuracy class 0.25 %	without = 4 - 20 mA, 2-wire /1 = 0 ... 5 V _{DC} /2 = 0 ... 10 V _{DC}	A 105 = 0 ... 40 bar A 115 = 0 ... 60 bar A 125 = 0 ... 100 bar A 135 = 0 ... 160 bar A 145 = 0 ... 250 bar A 155 = 0 ... 400 bar A 165 = 0 ... 600 bar A 175 = 0 ... 1000 bar	without = plug Form A (DIN 43650) incl. junction box 3 = plug M12x1 (5-pin, IP67) 5 = 2 m cable, IP67