




## Electromagnetic Flow Meter compact

for conductive liquids

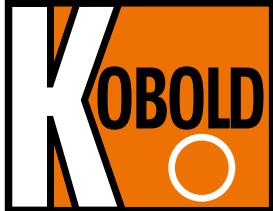

measuring  
• monitoring  
• analysing

MIK



MIK with frequency-, switching-, analogue output



MIK with digital plug on display



MIK with U-PACE electronics

MIK  
 

- Range from liquids, acids and caustic solutions:  
0.01-0.5 ... 35-700 l/min
- Accuracy:  $\pm 2.0\%$  of full scale
- $p_{max}$ : 10 bar;  $t_{max}$ : 80 °C
- Connection: G 1/2 ... G 2 3/4 male, diverse accessories
- Material:  
normal liquids: PPS, stainless steel  
aggressive liquids:  
PVDF, Hastelloy® or Tantalum
- Advantage:
  - no moving parts in the measuring tube
  - low pressure loss
  - any mounting position
  - short reaction time – replacement for calorimetric flow switch
  - high quality for lowest price



Display rotatable in 90° steps



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com



## Description

The new KOBOLD flow meter Type MIK is used for measuring and monitoring smaller and medium-sized flow of conductivity liquids in pipes.

The device operates according to the electromagnetic measurement principle. According to Faraday's Law of magnetic induction a voltage is induced in a conductor moving through a magnetic field. The electrically conductive measuring agent acts as the moved conductor. The voltage induced in the measuring agent is proportional to the flow velocity and is therefore a value for the volumetric flow. The flowing media must have a minimum conductivity. The induced voltage is picked up by two sensing electrodes which are in contact with the measuring agent and sent to the measuring amplifier. The flow rate will be calculated based on the cross sectional area of the pipe.

The measurement is not depending on the process liquid and its material properties such as density, viscosity and temperature. The devices can be equipped with a switching output, a frequency output or an analogue output. In addition, a universal U-PACE electronics (Universal Precision and Control Electronics, order code C3T0) is available and features two outputs arbitrarily configurable by the customer.

The compact electronics offers various diagnostic functions and the following features:

- Flow- and temperature measurement
- Monitoring, dosing and transmitter function
- Dosing function with external control input
- Coloured, multi-parameter configurable TFT-display, rotatable in 90° steps
- Bidirectional measuring
- Intuitive setup menu via 4 optical touch keys
- 2 configurable outputs (pulse-/frequency-/alarm- and analogue output)
- Grand and resettable totaliser
- IO link function

## Media

- Electric conductivity liquids
- Acids and caustic solutions
- Drinking, cooling and waste water
- Ground water, raw water
- Aggressive or salty solution
- Unsuitable for oil (missing conductivity)

## Areas of Application

Flow monitoring, flow measuring, dosing and counting for

- Machine building
- Chemical Industry
- Paper Industry
- Automobile Industry
- Cement Industry
- Laboratory

## Technical Details

Range:	see table
Accuracy:	±2.0 % of full scale
Repeat accuracy:	±1.0 % of full scale
Measurement process:	electromagnetic
Electrical conductivity:	min. 30 µS /cm (at MIK-...08 and 10: min. 200 µS/cm)
Mounting position:	in all directions, flow in direction of the arrow
In-/Outlet:	3 x DN / 2 x DN
Media temperature:	-20 ... +80 °C (max. +60 °C with PVC-connection set)
Ambient temperature:	-10 ... +60 °C
Max. pressure:	10 bar
Max. pressure loss:	max. 250 mbar at full scale
Max. medium viscosity:	20 cSt ≤ G1; 70 cSt ≥ G1½

## Wetted Parts

Sensor housing:	PPS or PVDF, fibreglass-reinforced
Connection set:	PVC-glue connection or hose connection, weld-on ends stainless steel 1.4404
Electrodes:	stainless steel 1.4404, Hastelloy® C4 or Tantalum
Seal:	NBR, FPM or FFKM
Response time $t_{90}$ :	approximately 1 s (at flow changes >10% FS)
Protection:	IP65

## Temperature measurement (C3T0)

Sensor:	digital
Accuracy:	≤2 °C (flow >0.2 m/s)
Measuring range:	temperature range of medium
Response time temperature $t_{90}$ (signal output):	<20 s

## Connection/Ranges

Connection	Inside diameter	Flow velocity at full scale	Range
G ½ male	5 mm	approx. 0.45 m/s	10 ... 500 ml/min
		approx. 0.9 m/s	0.05 ... 1.0 l/min
		approx. 2.7 m/s	0.16 ... 3.2 l/min
G ¾ male	10 mm	approx. 2.2 m/s	0.5 ... 10.0 l/min
		approx. 3.5 m/s	0.8 ... 16.0 l/min
G 1 male	15 mm	approx. 3.0 m/s	1.6 ... 32.0 l/min
		approx. 4.7 m/s	2.5 ... 50 l/min
G 1½ male	20 mm	approx. 3.3 m/s	3.2 ... 63 l/min
		approx. 5.3 m/s	5.0 ... 100 l/min
G 2 male	32 mm	approx. 3.3 m/s	8 ... 160 l/min
		approx. 6.6 m/s	16 ... 320 l/min
G 2¾ male	54 mm	approx. 3.6 m/s	25 ... 500 l/min
		approx. 5.1 m/s	35 ... 700 l/min

**MIK-...F300, MIK-...F390**

Impulse output:	PNP, Open Collector, max. 200 mA 500 Hz at full scale (...F300) 50...1000 Hz at full scale (...F390) factory set as per customer
request	
Power supply:	24 V <sub>DC</sub> ±20 %
Power consumption:	60 mA
Electrical connection:	plug M 12 x 1

**MIK-...S300, MIK-...S30D**

Display:	duo-LED for switch status
Switching output:	relay SPDT, max. 1A/30V <sub>DC</sub> or aktive 24 V <sub>DC</sub> , N/C / N/O
Switch point:	10...100% of full scale in 10%-steps that can be configured by the customer using a rotary switch
Power supply:	24 V <sub>DC</sub> ±20 %
Power consumption:	80 mA
Electrical connection:	plug M 12 x 1.5-pin

**MIK-...L303; MIK-...L343**

Output:	0(4)-20 mA, 3-wire
Max. load:	500 Ω
Power supply:	24 V <sub>DC</sub> ±20%
Power consumption:	80 mA
Electrical connection:	plug M 12 x 1

**MIK-...L443 (usage with AUF-3000)**

Output:	4-20 mA, 3-wire
Max. load:	500 Ω
Power supply:	24 V <sub>DC</sub> ±20%
Power consumption:	80 mA
Electrical connection:	plug DIN 43650

**MIK-...C3T0 (U-PACE electronics)**

Supply voltage:	19 - 30 V <sub>DC</sub> , internal power consumption max. 200 mA
Display:	TFT display, 128x128 pixels, 1.4" display orientation in 90° steps adjustable
Display repetition rate:	0.5...10 s, adjustable
Pulse output	Push-Pull, freely scalable, configurable for partial and accumulated totaliser
Frequency output	Push-Pull, freely scalable, 2 kHz @ overflow $f_{min}$ @ FS = 50 Hz $f_{max}$ @ FS = 1000 Hz

Alarm output:

NPN, PNP, Push-Pull,  
configurable max. 30 V<sub>DC</sub>,  
max. 200 mA short-circuit proof  
active, 3 wire, 0(4)-20 mA,  
max. load 500 Ω or 0(2)-10 V<sub>DC</sub>,  
(R<sub>i</sub> = 500 Ω)

Analogue output:

(factory calibrated with R<sub>L</sub> = 1 MΩ)  
active signal U<sub>high</sub> max. 30 V<sub>DC</sub>  
0 < Low < 10 V<sub>DC</sub>  
15 V<sub>DC</sub> < High < Vs

Control input:

Control input OUT1:  
START/STOP 0.5 s < t<sub>high</sub> < 4 s  
RESET t<sub>high</sub> > 5 s

Dosing function:

Dosing output OUT2:  
Push-Pull, High active

Electrical connection:

Electrical connection:  
plug M12x1, 4-pin

Shock resistance

DIN EN 60068-2-27:2010:20 g (11 ms)

Vibration resistance

DIN EN 60068-2-6:2008: 5 g (10 ... 2000 Hz)

Environmental testing

DIN EN 60068-2-30:2006: severity level b

**Configuration of outputs**

Output 1 (OUT1, PIN 4)	Output 2 (OUT2, PIN 2)
Analogue output 4-20 mA	Analogue output 4-20 mA
Analogue output 0-20 mA	Analogue output 0-20 mA
Analogue output 2-10 V	Analogue output 2-10 V
Analogue output 0-10 V	Analogue output 0-10 V
Switching output NPN/PNP/PP	Switching output NPN/PNP/PP
Pulse output PP	Pulse output PP
Frequency output PP	Frequency output PP
Communication mode KofCom	
Communication mode IO-Link	
Control input	
Control input dosing function	Dosing output

**IO-Link specification**


Manufacturer ID:	1105 (decimal), 0 x 0451 (hex)
Manufacturer name:	Kobold Messring GmbH
IO-Link specification:	V1.1
Bitrate:	COM3
Minimal cycle time:	1,1 ms
SIO-Mode:	yes (OUT1 in configuration IO-Link)
Block parameterisation:	yes
Operational readiness:	10 s
Max. cable length:	20 m




## Electromagnetic Flow Meter Compact Model MIK

### Electrical Connections


**MIK-...S300**

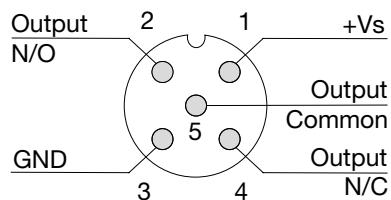


**MIK-...S30D**

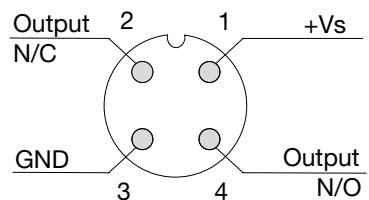


**MIK-...L3x3, MIK-...F3x0**

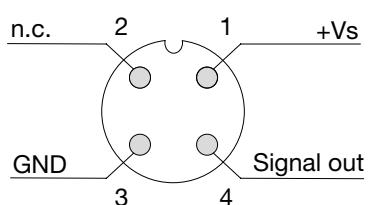

**MIK-...L443**



**MIK-...C3T0**

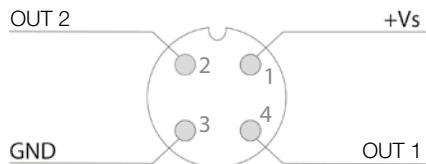

**Order Details (Example: MIK-5NA 10 A F300)**

Model	Range	Connection set	Electronics
	..08.. = 10...500 ml/min, G 1½ ..10.. = 0.05...1.0 l/min, G 1½ ..15.. = 0.16...3.2 l/min, G 1½	..A.. = without <sup>1)</sup> ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	
MIK-5NA.. = PPS-housing, NBR-seal, stainless steel-electrode	..20.. = 0.5...10.0 l/min, G ¾ ..25.. = 0.8...16.0 l/min, G ¾	..A.. = without <sup>1)</sup> ..K.. = PVC-glue connection ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	<b>Frequency output</b> ..F300 = M12-plug, 500 Hz ..F390 = M12-plug, 50...1000 Hz <sup>2)</sup>
MIK-5VA.. = PPS-housing, FPM-seal, stainless steel-electrode	..30.. = 1.6...32.0 l/min, G 1 ..35.. = 2.5...50.0 l/min, G 1	..A.. = without <sup>1)</sup> ..K.. = PVC-glue connection ..P.. = PVC-hose connection ..E.. = stainless steel-weld-on ends	<b>Switching output</b> ..S300 = relay, M12-plug ..S30D = active 24 V <sub>DC</sub> , M12-plug
MIK-5NC.. = PPS-housing, NBR-seal, Hastelloy®-electrode	..50.. = 3.2...63 l/min, G 1½ ..55.. = 5.0...100 l/min, G 1½		<b>Analogue output</b> ..L303 = M12-plug, 0 - 20 mA ..L343 = M12-plug, 4 - 20 mA ..L443 = DIN-plug, 4 - 20 mA
MIK-5VC.. = PPS-housing, FPM-seal, Hastelloy®-electrode	..60.. = 8...160 l/min, G 2 ..65.. = 16...320 l/min, G 2	..A.. = without <sup>1)</sup> ..K.. = PVC-glue connection ..E.. = stainless steel-weld-on ends	<b>U-PACE electronics</b> ..C3T0 = compact, TFT display, 2 outputs (current/voltage/pulse/frequency/alarm output/IO link configurable), M12x1 plug
MIK-6FC.. = PVDF-housing, FFKM-seal, Hastelloy®-electrode	..80.. <sup>3)</sup> = 25...500 l/min, G 2¾ ..85.. <sup>3)</sup> = 35...700 l/min, G 2¾		
MIK-6FT.. = PVDF-housing, FFKM-seal, Tantalum-electrode			

<sup>1)</sup> Incl. frontal gaskets (2 pc. o-rings)<sup>2)</sup> Please specify frequency at full scale in clear text while ordering<sup>3)</sup> Not with MIK-5NC/-5VC**Weight Sensor**

Model	PPS	PVDF
MIK-...08/10/15 (1/2")	approx. 180 g	approx. 210 g
MIK-...20/25 (3/4")	approx. 190 g	approx. 225 g
MIK-...30/35 (1")	approx. 270 g	approx. 325 g
MIK-...50/55 (1 1/2")	approx. 410 g	approx. 500 g
MIK-...60/65 (2")	approx. 560 g	approx. 610 g
MIK-...80/85 (2 3/4")	approx. 1200 g	approx. 1370 g

**Weight Electronics**

Model	Weight
MIK-...F3x0	
MIK-...S30x	approx. 80 g
MIK-...Lxx3	
MIK-...C3T0	approx. 300

Total weight = weight sensor + weight electronics





## Electromagnetic Flow Meter Compact Model MIK



### Dimensions [mm]

Model	G	L1	L2	L3	L4	L5	L6	H1	H2
MIK-xxx08A MIK-xxx10A MIK-xxx15A	G 1/2	118	90	14	46	58	36	43	28
MIK-xxx20A MIK-xxx25A	G 3/4	122	90	16	46	58	36	43	28
MIK-xxx30A MIK-xxx35A	G 1	126	90	18	46	58	36	49.5	29.5
MIK-xxx50A MIK-xxx55A	G 1 1/2	134	90	22	68	80	36	66	31.5
MIK-xxx60A MIK-xxx65A	G 2	138	90	24	68	80	36	72	36
MIK-xxx80A MIK-xxx85A	G 2 3/4	202	150	26	96	110	75	104	52



MIK-...F3x0, MIK-...S30x, MIK-...L3x3

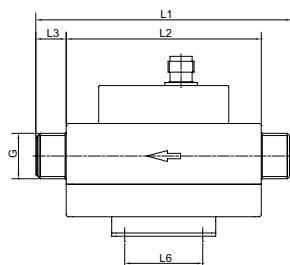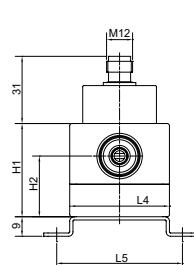


MIK-...L443

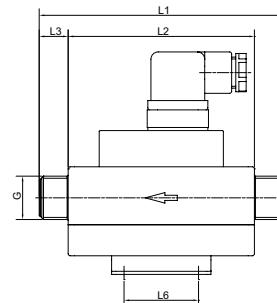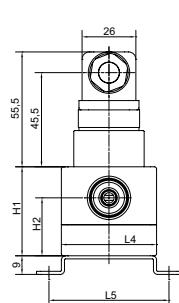


MIK-...C3T0

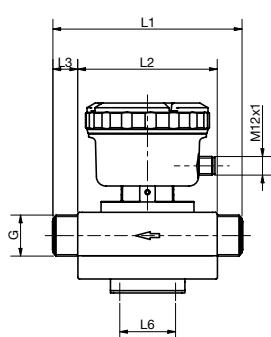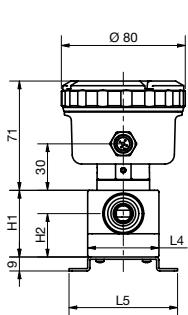

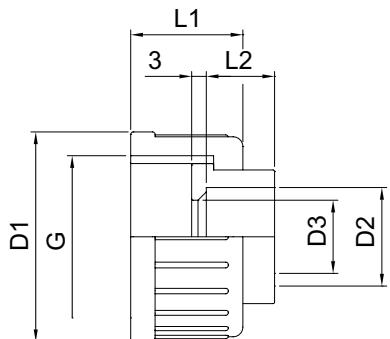


**Dimensions connection set PVC-glue connection**

G	D1	D2	D3	L1	L2
G 1/2	not available				
G 3/4	Ø 35	Ø 16	Ø 10.5	21	14
G 1	Ø 43	Ø 20	Ø 15	23	16
G 1 1/2	Ø 60	Ø 32	Ø 26	27	22
G 2	Ø 74	Ø 40	Ø 33	30	26
G 2 3/4	Ø 103	Ø 63	Ø 54	38	38

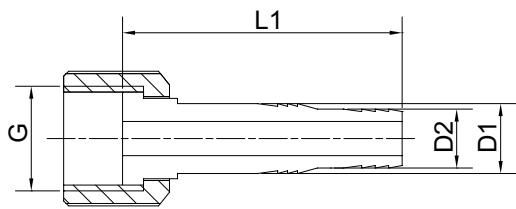

**Dimensions connection set PVC-hose connection**

G	D1	D2	L
G 1/2	Ø 14	Ø 12	56
G 3/4	Ø 18	Ø 16	60
G 1	Ø 22	Ø 20	67
G 1 1/2	not available		
G 2	not available		
G 2 3/4	not available		

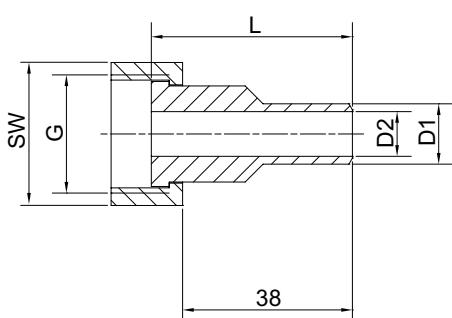

**Dimensions connection set stainless steel weld-on ends**

G	SW	L	D1	D2
G 1/2	24	45	Ø 10.2	Ø 5
G 3/4	32	45	Ø 13.5	Ø 10
G 1	41	45	Ø 19	Ø 15
G 1 1/2	55	60	Ø 25	Ø 20
G 2	70	60	Ø 38	Ø 32
G 2 3/4	90	60	Ø 60.3	Ø 54